


Stage Lighting LED Pixel Bar 5 COB:5x30Watt RGB, Pixel Bar

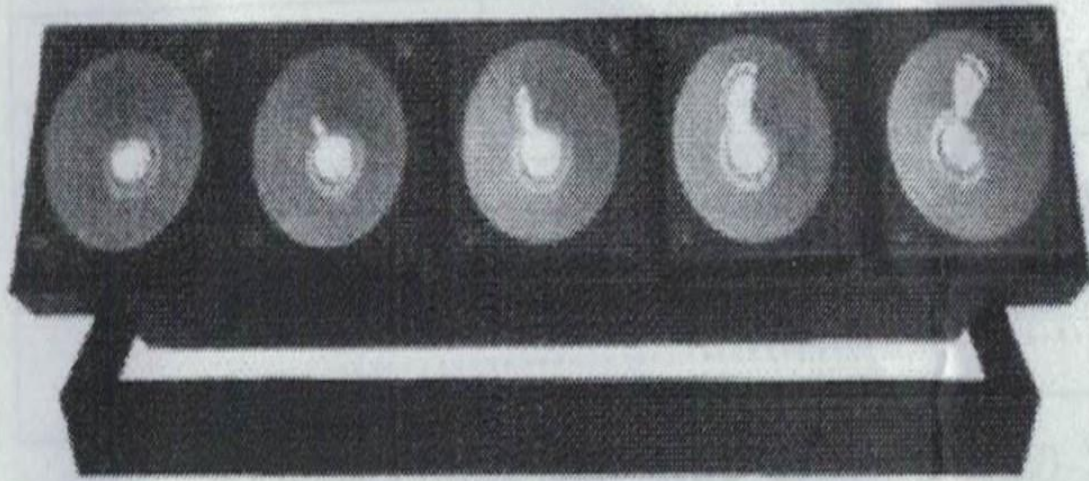

Product Details:

- * Input voltage: AC90--240V, 50--60HZ
- * Total Power : 180 W
- * LED Source : 5x30W RGB 3in1
Red, Green, Blue and mixed Color
- * DMX-Control-channels: 3/7/15/19 DMX Channels
- * Control modes: DMX512, Auto, Run, Strobe, Sound Control, Master/Slave, Running Horse, Point Control
- * Strobe: 1-20 flashes cond
- * Long Lifespan LEDs (more than 60,000 hours)
- * Control signal: international standard DMX512
- * Beam Angle: 25 degree
- * Waterproof level: IP20
- * Product Size: 58x14x13 cm
- * Weight: 5 KG

Addr	A001-A512	DMX 512
------	-----------	---------

CHnd	3CH	3 Channels
------	-----	------------

	7CH	7 Channels
	15CH	15 Channels
	19CH	19 Channels

SLnd	Auto	Auto mode
------	------	-----------

	SOUN	Sound mode
	SL 1	Dmx mode
	SL 2	slave mode

SH**	0-13	Auto mode effect recommend 12)
------	------	--------------------------------

Sped	0-100	Auto speed adjustment
------	-------	-----------------------

SEnS	0-100	Sound sensitivity adjustment
------	-------	------------------------------

r***	0-255	Red dimming
------	-------	-------------

G***	0-255	Green dimming
------	-------	---------------

b***	0-255	Blue dimming
------	-------	--------------

LEd	OFF	Off screen after 5 seconds
-----	-----	----------------------------

	ON	screen is always on
--	----	---------------------

3 DMX mode

Channels	Features	Description
----------	----------	-------------

1	Red dimming	0-255
2	Green dimming	0-255
3	Blue dimming	0-255

7 DMX mode

Channels	Features	Description
1	Total dimming	0-255
2	Strobe	0-255
3	No effect	0-15
	Auto effect selection	16-127 (recommend 120-127)
	Sound effect selection	127-255 (recommend 247-255)
4	Speed adjustment	0-255
5	Red dimming	0-255
6	Green dimming	0-255
7	Blue dimming	0-255

15 DMX mode

Channels	Features	Description
1	1 led Red dimming	0-255
2	1 led Green dimming	0-255
3	1 led Blue dimming	0-255
4	2 led Red dimming	0-255
5	2 led Green dimming	0-255
6	2 led Blue dimming	0-255

.....

13	5 led Red dimming	0-255
14	5 led Green dimming	0-255
15	5 led Blue dimming	0-255

19 DMX mode

Channels	Features	Description
1	Total dimming	0-255
2	Strobe	0-255
3	No effect	0-15
4	Auto effect selection	16-127 (recommend 120-127)
	Sound effect selection	127-255 (recommend 247-255)
	Speed adjustment	0-255
5	1 led Red dimming	0-255
6	1 led Green dimming	0-255
7	1 led Blue dimming	0-255
8	2 led Red dimming	0-255
9	2 led Green dimming	0-255
10	2 led Blue dimming	0-255
.....		
17	5 led Red dimming	0-255
18	5 led Green dimming	0-255
19	5 led Blue dimming	0-255